


LEPUS INDUSTRIALE **BR (36V)**

Gearmotor in oil bath for condominium sliding gates for max leaf weight **up to 1000 kg**

- Equipped with metal case
- Industrial-Heavy Duty applications
- Oil-bath lubrication in the gears reductions and electric motor
- Absolute Encoder built-in (POSITION GATE RT), for speed control during opening/closing and function of reversal on obstacle. The electronic device allows to build plants in compliance with the requirements of the (UNI EN 12453:2017) regarding safety and impact forces.



SPECIFICATIONS	SATURN 800 BR
Power supply	36V - 230V ($\pm 5\%$) 50/60 Hz
Motor Power	330 W (36V)
Opening time	0,30 m/s
Max duty cycles	100 %
Working temperature	-20°C /+ 55°C
Weight	17 kg
Max weight	1000 kg
Protection class	IP55
Pinion	Z16
Max thrust	70 Nm
Limit switch	Absolute Encoder

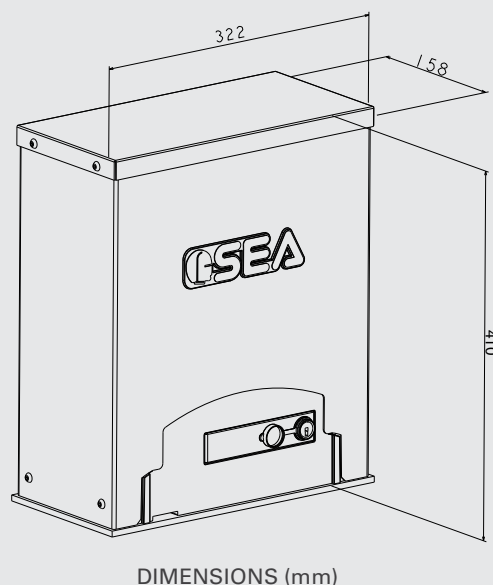

Control unit
UNIGATE BR



Absolute Encoder
POSITION GATE RT



BRUSHLESS technology