




FULL TANK SP

Hydraulic swing gate operator
condominium/industrial use
for leaf lengths up to max. **7 METERS**



Positive stop



Round joint for
stroke adjustment



On request versions with
hydraulic slowdown




Full Tank 270	Full Tank 390	Hydraulic Pump AC	Hydraulic Pump SB	MAX LEAF LENGTH
	●		●	7 m
●		●		1,8 m
	●	●		2,2 m
●			●	6,0 m

- ▶ Oil lubrication of all mechanical components
- ▶ Anti crushing guaranteed through by-pass valves for max. thrust adjustment
- ▶ 270 mm or 390 mm stroke
- ▶ Standard, oscillating aluminium back fixing fork
- ▶ Hydraulic distributor out of strong aluminium
- ▶ 20 mm rod diameter

■ TECHNICAL DATA

FULL TANK SP

DIMENSIONS (mm)

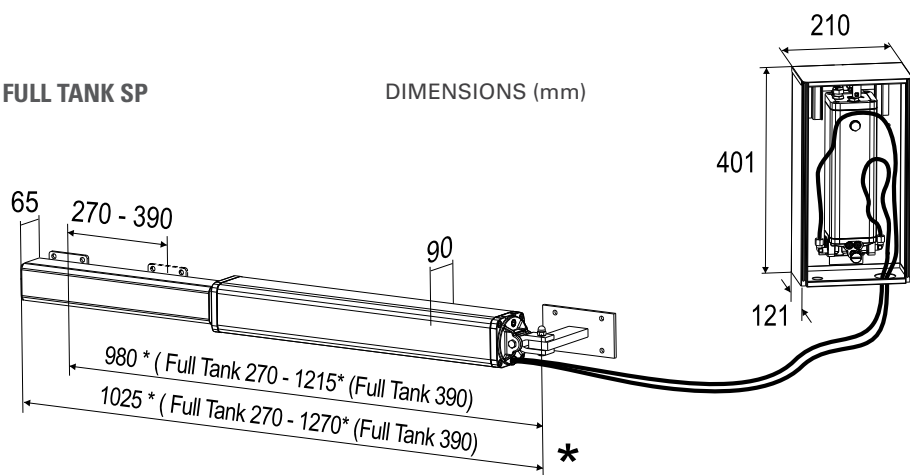

SPECIFICATIONS

FULL TANK SP

Power supply	230Vac±5% - 50/60Hz
Motor Power	220 W
Shaft Stroke	270/390 mm
Max Cycles/Hour	55
Working temperature	-40°C / + 60°C
Weight	12,8 / 15,2 Kg
Max leaf length	6,0 / 7,0 m
Opening degrees	90° - 125°
Shaft speed	1 cm/sec - 1,5 cm/sec
Protection class	IP55
Starting capacitor	12,5µF/-
Max thrust	640 daN

■ ACCESSORIES



Adjustable rear bracket to screw
2 pcs



PROBE Kit to manage low temperature
+ LE unit + 1,8 m cable



Absolute Linear Encoder



Cylinder with Din Key 10 encryptions (1 pc)



Bracket for outwards opening
L 400 mm - (2 pcs)



INOX Back/Front brackets Kit



Kit Positive stops



Green oil (5 liters can)

■ ELECTRONIC CONTROL UNITS

■ GATE 2 DG

- Electronic control unit for two 230V operators management



■ UNIGATE 2I (INVERTER management)

- Bidirectional and Linear (Position Gate) Encoder management
- Standard limit switch management (LE card is NO longer required)
- Battery management for emergency function
- Power switching from 90Vac to 265V - 2Ah (1.3 Ah for accessories)
-> the additional Power Supply is no longer necessary
- 2 programmable inputs (GP1 and GP2)
- Programmable timer and integrated UPS
- Connection between Inverter module and module management with USB cable
- 2 programmable output relays (electric lock, traffic light, courtesy light ...) -> SUP device is no longer necessary!
- Verification and control of the accessories charge

Advantages:

More Cycles/Hour

N.C. inputs protected by 8K2 resistance

Amperometric management for inversion in case of obstacle

Low temperature in intensive cycle

High torque during slowing down

UNIGATE - I *INVERTER technology*



SEA S.p.A.

Zona Industriale Sant'Atto - (TE) - 64100 - ITALY - Phone: +39 0 861 588341

www.seateam.com | info@seateam.com